

Bonhawa Nasal Cannula


Product Features

- Available in Small, Medium, and Large
- Lightweight and high functioning
- Pairs seamlessly with the Bonhawa



Cannula Construction

- ① 2.2 cm (M) Standard Swivel Connector
- ② Neck Strap
- ③ Gas Delivery Conduit
- ④ Head Strap
- ⑤ Nasal Prong Interface
- ⑥ Retaining Clip

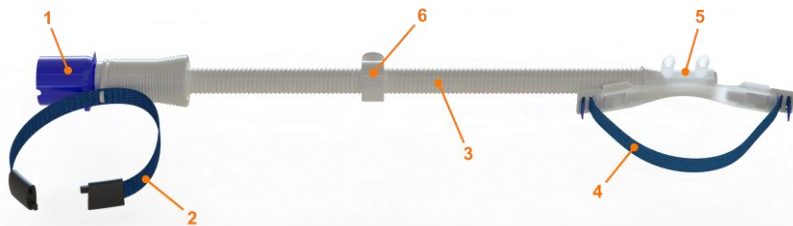

Cannula Details

Catalog Number	ENC03 (Large)
Length	35 cm ± 3.5 cm
Cuff Connector	22 mm Standard
Nasal Prongs ID	0.60 cm ± 0.05 cm
Spacing between Nasal Prongs	1.9 cm ± 0.1 cm
Material	ABS, HDPE, TPE, PP
Recommended Flow Rate Range	20 - 80 L/min

Catalog Number	ENC02 (Medium)
Length	32 cm ± 5 cm
Cuff Connector	22 mm Standard
Nasal Prongs ID	0.50 cm ± 0.05 cm
Spacing between Nasal Prongs	1.50 cm ± 0.05 cm
Material	ABS, HDPE, TPE, PP
Recommended Flow Rate Range	10 - 80 L/min

Catalog Number	ENC01 (Small)
Length	32 cm ± 5 cm
Cuff Connector	22 mm Standard
Nasal Prongs ID	0.44 cm ± 0.05 cm
Spacing between Nasal Prongs	1.53 cm ± 0.05 cm
Material	ABS, HDPE, TPE, PP
Recommended Flow Rate Range	2 - 25 L/min (Pediatric) 10-40 L/min (Adult)

Flow Characteristics

ENC03 (Large)

Resistance to flow at 30 L 0.5 kPa

ENC02 (Medium)

Resistance to flow at 30 L 0.7 kPa

ENC01 (Small)

Resistance to flow at 30 L 1.2 kPa



Contact Us

Telesair, Inc.

199 Technology Drive, Suite 110

Irvine, CA 92618 USA

W: www.telesair.com

E: info@telesair.com

T: +1 949.570.3553